



Shape **1003** Black satin on square rosette
Ball bearing technology **pullbloc®**



Technical drawing

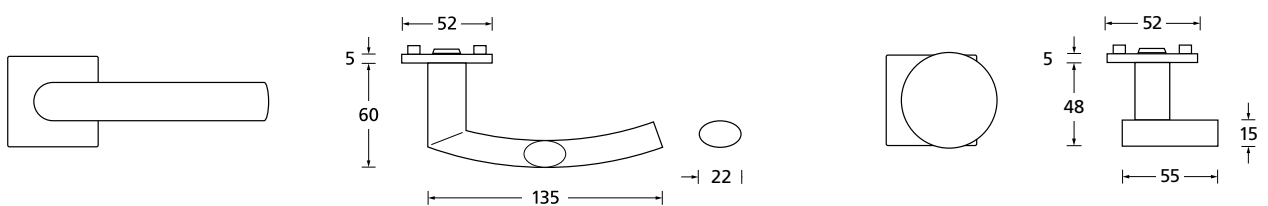

Shape **1003** Black satin on square rosette
 Ball bearing technology **pullbloc®**

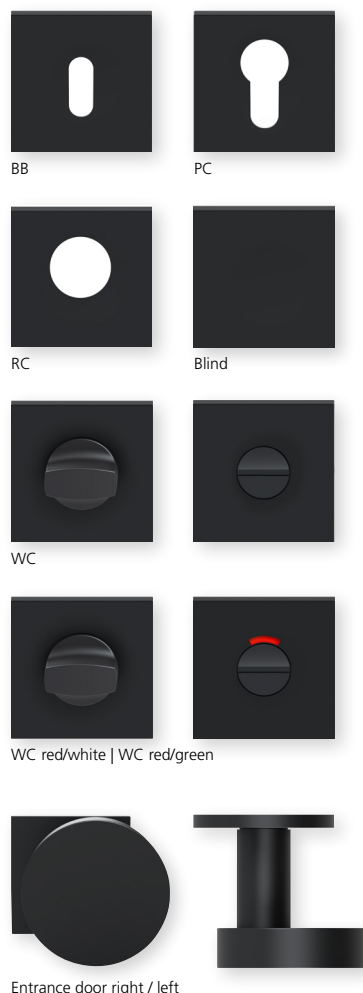

- | | |
|-----------------------------|--------------------|
| Without key rosettes - Set | PBU-QBS10030S |
| BB - Set | PBU-QBS10030 |
| Blind - Set | PBU-QBS10031 |
| PC - Set | PBU-QBS10032 |
| RC - Set | PBU-QBS10038 |
| WC - Set | PBU-QBS10033 |
| WC red/white - Set | PBU-QBS100331 |
| WC red/green - Set | PBU-QBS100332 |
| Entrance door PC right/left | PBU-QBS100353/63 |
| Entrance door RC right/left | PBU-QBS1003853/863 |

Technology:

- Material:** Stainless steel 304 to AISI standard
Surface: Black satin
Door thickness:: 38 - 42 mm
Square dimension:: 8 mm square pin (8.5 mm spacer sleeve)
Technology: Ball bearing technology, Maintenance-free ball bearing made of hardened chrome steel, 2 spring steel compression springs on both sides, 30-year functional warranty
Use category: : DIN EN 1906 Use category 4
 Classification: **4 | 7 | - | 0 | 0 | 4 | 0 | B**

