



Shape **1025** Stainless steel matt on round rosette
Ball bearing technology **pullbloc®**

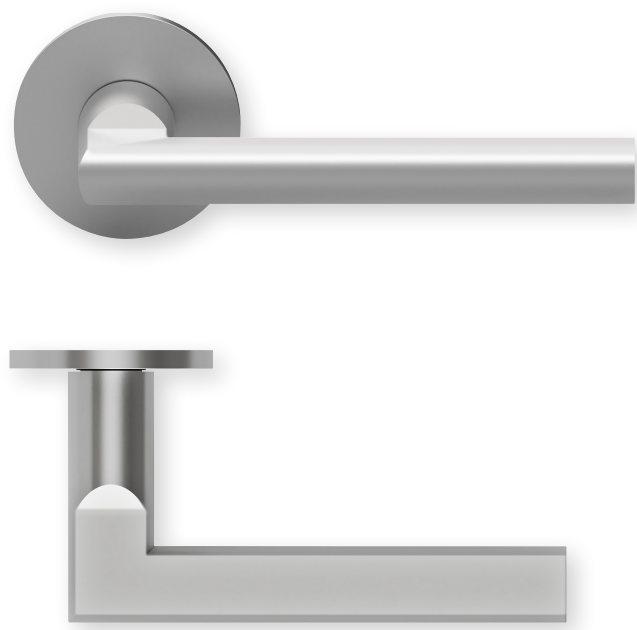


Technical drawing

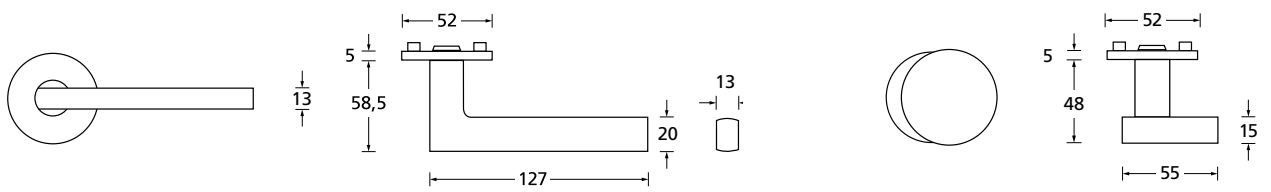

All dimensions stated above are subject to the usual commercial tolerances and we reserve the right to make technical and design changes to the products stated above.

Shape **1025** Stainless steel matt on round rosette

Ball bearing technology **pullbloc**[®]

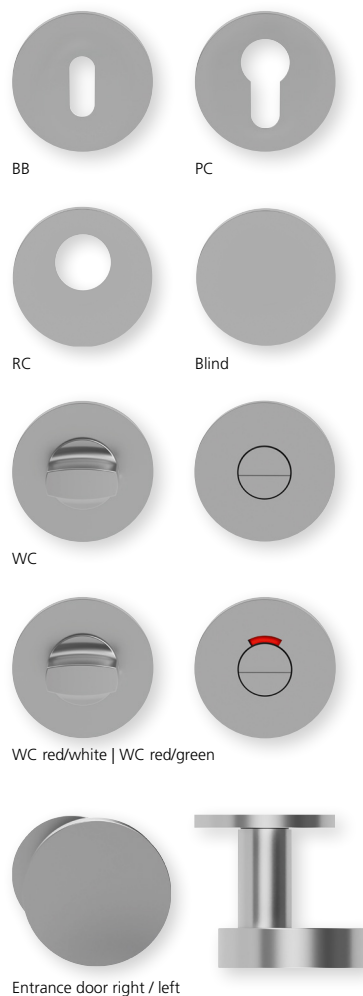

Without key rosettes - Set
 BB - Set
 Blind - Set
 PC - Set
 RC - Set
 WC - Set
 WC red/white - Set
 WC red/green - Set
 Entrance door PC right/left
 Entrance door RC right/left

PBU-RM10250S
 PBU-RM10250
 PBU-RM10251
 PBU-RM10252
 PBU-RM10258
 PBU-RM10253
 PBU-RM102531
 PBU-RM102532
 PBU-RM102553/63
 PBU-RM1025853/863

Technology:

Material: Stainless steel 304 to AISI standard
Surface: Stainless steel matt
Door thickness:: 38 - 42 mm
Square dimension:: 8 mm square pin (8.5 mm spacer sleeve)
Technology: Ball bearing technology, Maintenance-free ball bearing made of hardened chrome steel, 2 spring steel compression springs on both sides, 30-year functional warranty
Use category: : DIN EN 1906 Use category 4
 Classification: **4 | 7 | - | 0 | 0 | 4 | 0 | B**

