



Shape **1025** PVD titan satin on square rosette
Plain bearing technology **slidebloc®**

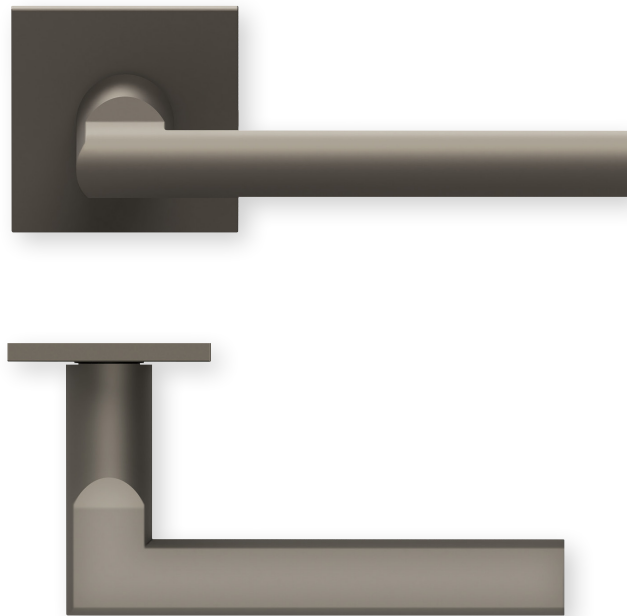


Technical drawing

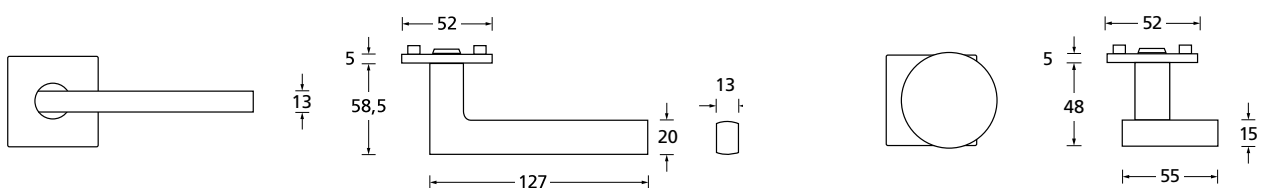

Shape **1025** PVD titan satin on square rosette

Plain bearing technology **slidebloc®**

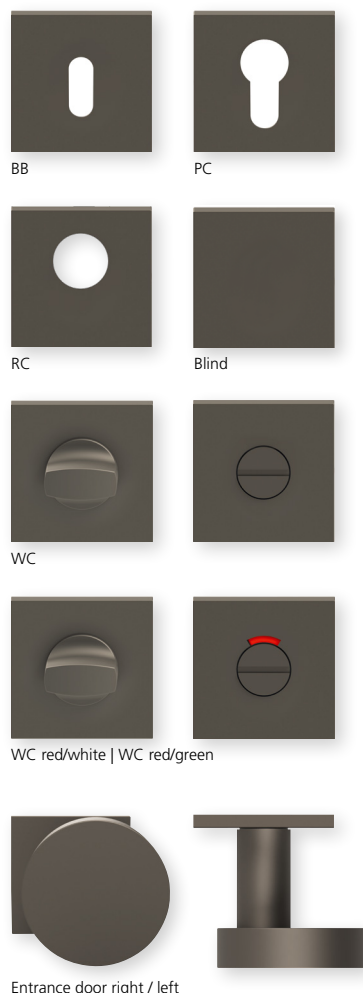

Without key rosettes - Set
 BB - Set
 Blind - Set
 PC - Set
 RC - Set
 WC - Set
 WC red/white - Set
 WC red/green - Set
 Entrance door PC right/left
 Entrance door RC right/left

SBU-QTT10250S
 SBU-QTT10250
 SBU-QTT10251
 SBU-QTT10252
 SBU-QTT10258
 SBU-QTT10253
 SBU-QTT102531
 SBU-QTT102532
 SBU-QTT102553/63
 SBU-QTT1025853/863

Technology:

Material: Stainless steel 304 to AISI standard
Surface: PVD titan satin
Door thickness: 38 - 42 mm
Square dimension: 8 mm square pin (8.5 mm spacer sleeve)
Technology: Plain bearing technology, Maintenance-free plain bearings made of lubricated polyamide, 2 spring steel compression springs on one side, 10-year functional warranty
Use category: DIN EN 1906 Use category 3
 Classification: **3 | 7 | - | 0 | 0 | 3 | 0 | B**

